


# System "Damaged screed with inadequate stability"

For the reliable refurbishment of damaged surfaces with insufficient stability

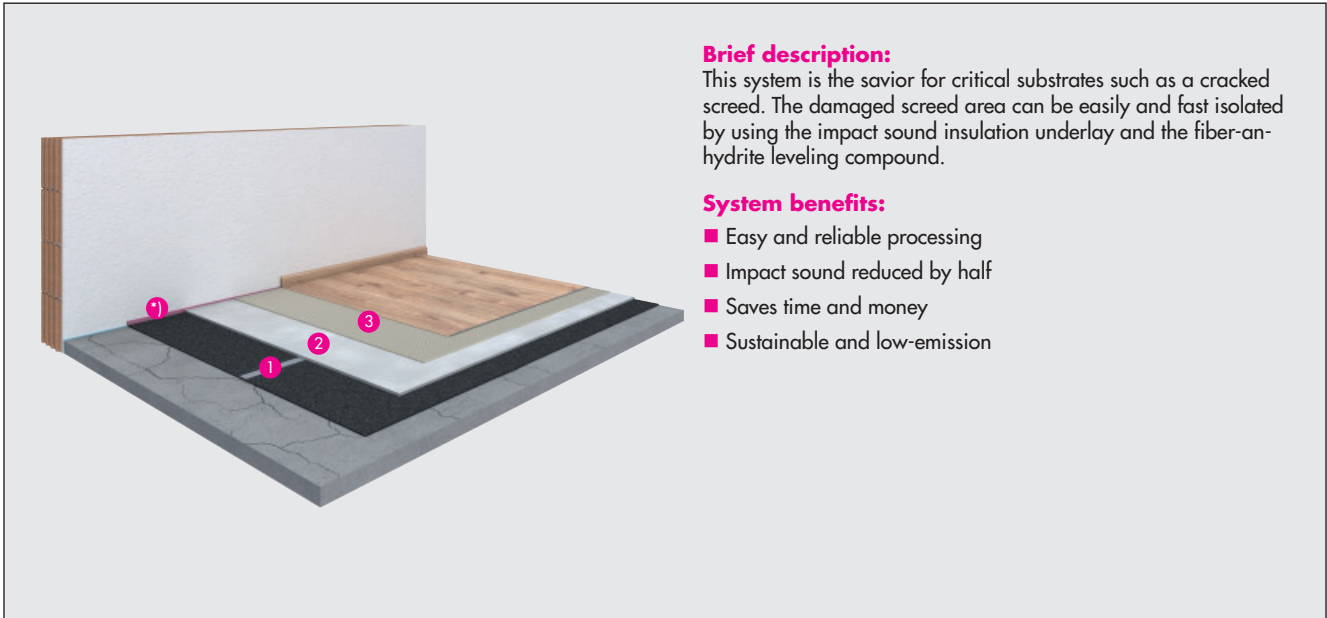

**Brief description:**

This system is the savior for critical substrates such as a cracked screed. The damaged screed area can be easily and fast isolated by using the impact sound insulation underlay and the fiber-anhydrite leveling compound.

**System benefits:**

- Easy and reliable processing
- Impact sound reduced by half
- Saves time and money
- Sustainable and low-emission

Worksteps	Products
<b>Miscellaneous</b> Impact sound reduction underlay	1 TF 305 THOMSIT-FLOOR® damping underlay (5 mm) universal impact sound reduction underlay under many types of flooring
<b>Floor leveler</b>	2 AS 2 Fiber anhydrite floor levelling compound for producing layers of 3 - 30 mm thickness in one application
<b>Flooring adhesive</b>	3 K 190 F Fiber-reinforced PVC and rubber flooring adhesive especially suited for PVC design flooring (LVT)
<b>Supplementary product</b>	4 TRD 5 Self-adhesive edge insulation strip for preventing sound transmission

**PCI Augsburg GmbH**  
Piccardstraße 11, 86159 Augsburg,  
Tel.: +49 821 5901 0

thomsit-info@pci-group.eu  
www.thomsit.com

The above information, in particular recommendations for the handling and use of our products, is based on our professional knowledge and experience. As materials and conditions may vary with each intended application and thus are beyond our sphere of influence, we strongly recommend that in each case sufficient tests are conducted to check the suitability of our products for the intended application method and use. Legal liability cannot be accepted on the basis of the contents of this technical data sheet or any verbal advice given unless there is evidence of wilful intent or gross negligence on our part. This technical data sheet supersedes all previous editions relevant to this product.